




datenblatt | datasheet

klemmen | clamps

end clamp 30-35 uni ic endklemme 30-35 uni ik

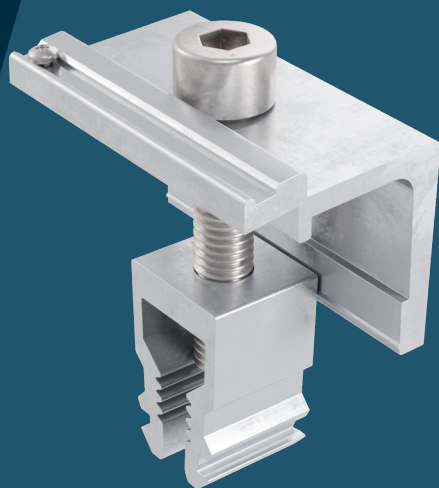


end clamp 30-35 uni ic 50 with pin / endklemme 30-35 uni ik 50 pin
material: EN AW-6063 T66 / A2-70

grounding pin / erdungspin	dimensions HxBxL Abmessungen HxBxL	color Farbe	weight Gewicht	product no. Prod. Nr.
with / mit	60x32x50 mm	silver / silber	0,061 kg	803304CP1 30-35
with / mit	60x32x50 mm	black / schwarz	0,061 kg	803394CP1 30-35

technical data end clamp 30-35 uni ic technische Daten endklemme 30-35 uni ik

Clamping range / Klemmbereich	30-35 mm
Clamping overlap / Klemmübergriff	10 mm
Clamping width / Klemmbreite	50 mm
Tightening torque for ISO 4762 M8x35/ Anzugsmoment ISO 4762 M8x35	8 - 10 Nm

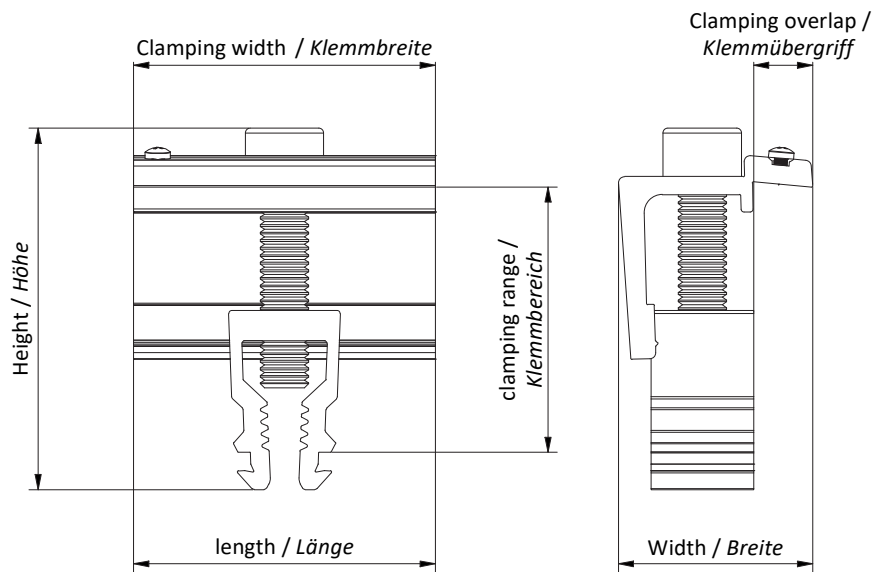

end clamp 36-42 uni ic endklemme 36-42 uni ik




end clamp 36-42 uni ic 50 with pin / endklemme 36-42 uni ik 50 pin
 material: EN AW-6063 T66 / A2-70


grounding pin / erdungspin	dimensions HxBxL Abmessungen HxBxL	color Farbe	weight Gewicht	product no. Prod. Nr.
with / mit	65x32x50 mm	silver / silber	0,062 kg	803304CP1 36-42
with / mit	65x32x50 mm	black / schwarz	0,062 kg	803394CP1 36-42

technical data end clamp 36-42 uni ic technische Daten endklemme 36-42 uni ik

Clamping range / Klemmbereich	36-42 mm
Clamping overlap / Klemmübergriff	10 mm
Clamping width / Klemmbreite	50 mm
Tightening torque for ISO 4762 M8x40/ Anzugsmoment ISO 4762 M8x40	8 - 10 Nm

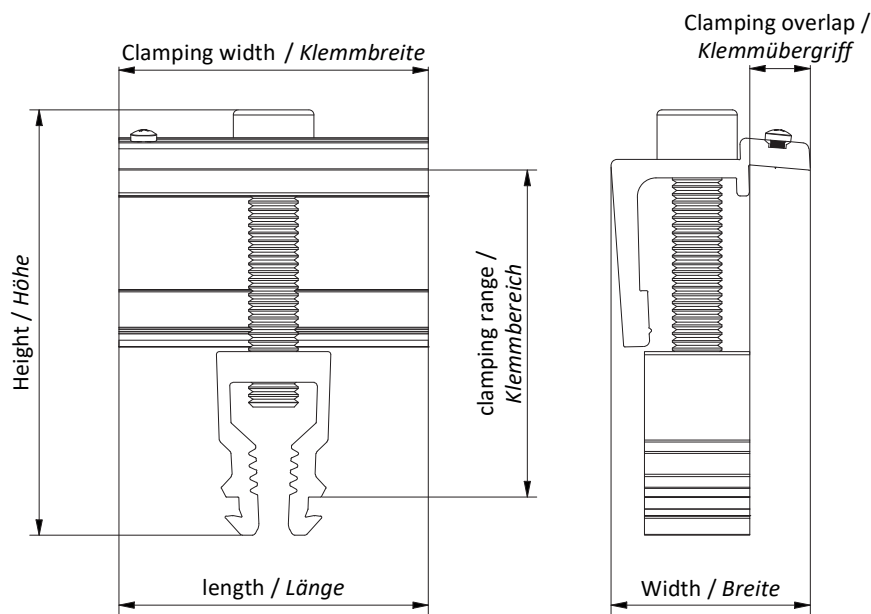


middle clamp 30-35 uni ic mittelklemme 30-35 uni ik

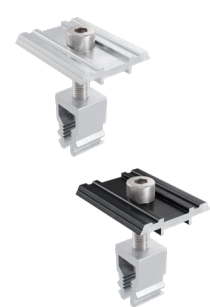

middle 30-35 clamp uni ic 50 / mittelklemme 30-35 uni ik 50
material: EN AW-6063 T66 / A2-70

grounding pin / erdungspin	dimensions HxBxL Abmessungen HxBxL	color Farbe	weight Gewicht	product no. Prod. Nr.
without / ohne	58x39x50 mm	silver / silber	0,053 kg	803301C 30-35
without / ohne	58x39x50 mm	black / schwarz	0,053 kg	803391C 30-35

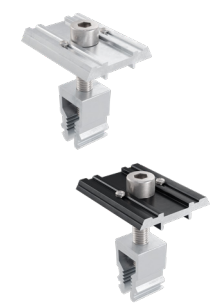


middle 30-35 clamp uni ic 50 with pin / mittelklemme 30-35 uni ik 50 pin
material: EN AW-6063 T66 / A2-70


grounding pin / erdungspin	dimensions HxBxL Abmessungen HxBxL	color Farbe	weight Gewicht	product no. Prod. Nr.
with / mit	58x39x50 mm	silver / silber	0,053 kg	803301CP1 30-35
with / mit	58x39x50 mm	black / schwarz	0,053 kg	803391CP1 30-35

technical data middle clamp 30-35 uni ic technische Daten mittelklemme 30-35 uni ik

Clamping range / Klemmbereich	30-35 mm
Clamping overlap / Klemmübergriff	11 mm
Clamping width / Klemmbreite	50 mm
Tightening torque for ISO 4762 M8x40/ Anzugsmoment ISO 4762 M8x40	8 - 10 Nm

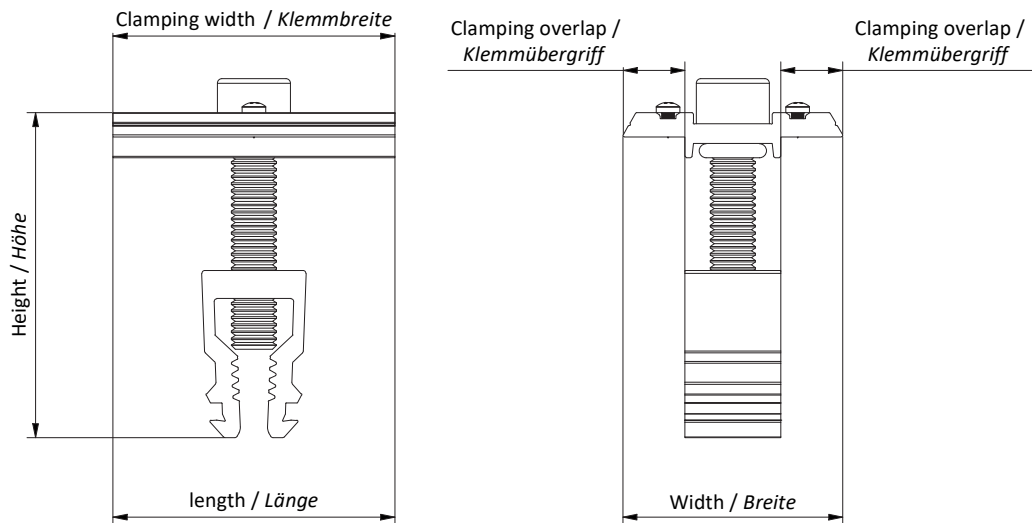

middle clamp 36-42 uni ic mittelklemme 36-42 uni ik

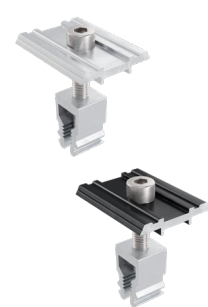

middle 36-42 clamp uni ic 50 / mittelklemme 36-42 uni ik 50
material: EN AW-6063 T66 / A2-70

grounding pin / erdungspin	dimensions HxBxL Abmessungen HxBxL	color Farbe	weight Gewicht	product no. Prod. Nr.
without / ohne	63x39x50 mm	silver / silber	0,053 kg	803301C 36-42
without / ohne	63x39x50 mm	black / schwarz	0,053 kg	803391C 36-42




middle 36-42 clamp uni ic 50 with pin / mittelklemme 36-42 uni ik 50 pin
material: EN AW-6063 T66 / A2-70

grounding pin / erdungspin	dimensions HxBxL Abmessungen HxBxL	color Farbe	weight Gewicht	product no. Prod. Nr.
with / mit	63x39x50 mm	silver / silber	0,053 kg	803301CP1 36-42
with / mit	63x39x50 mm	black / schwarz	0,053 kg	803391CP1 36-42

technical data middle clamp 36-42 uni ic technische Daten mittelklemme 36-42 uni ik

Clamping range / Klemmbereich	36-42 mm
Clamping overlap / Klemmübergriff	11 mm
Clamping width / Klemmbreite	50 mm
Tightening torque for ISO 4762 M8x45/ Anzugsmoment ISO 4762 M8x45	8 - 10 Nm

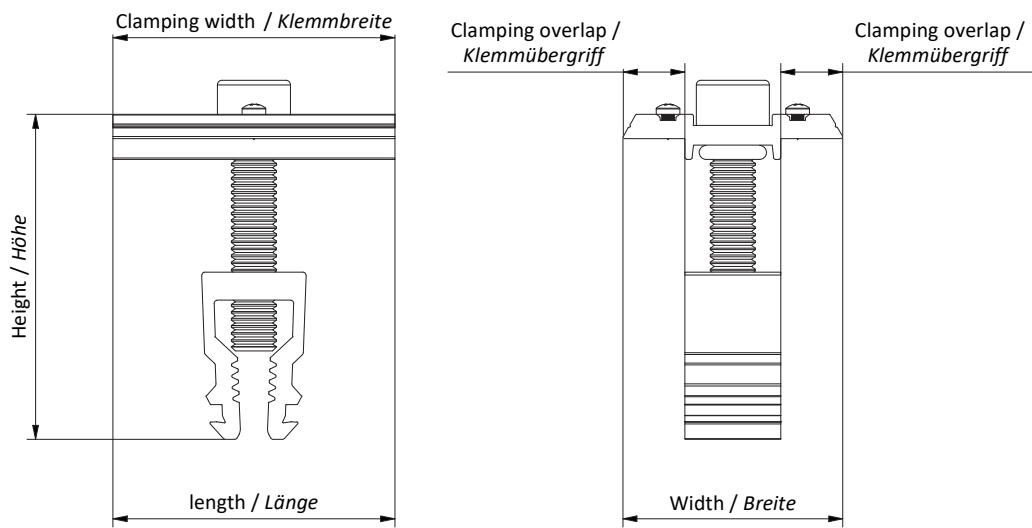

all you need is us.

one production. full service.